




01 Demolition Plan
Scale: 1/8" = 1'-0"

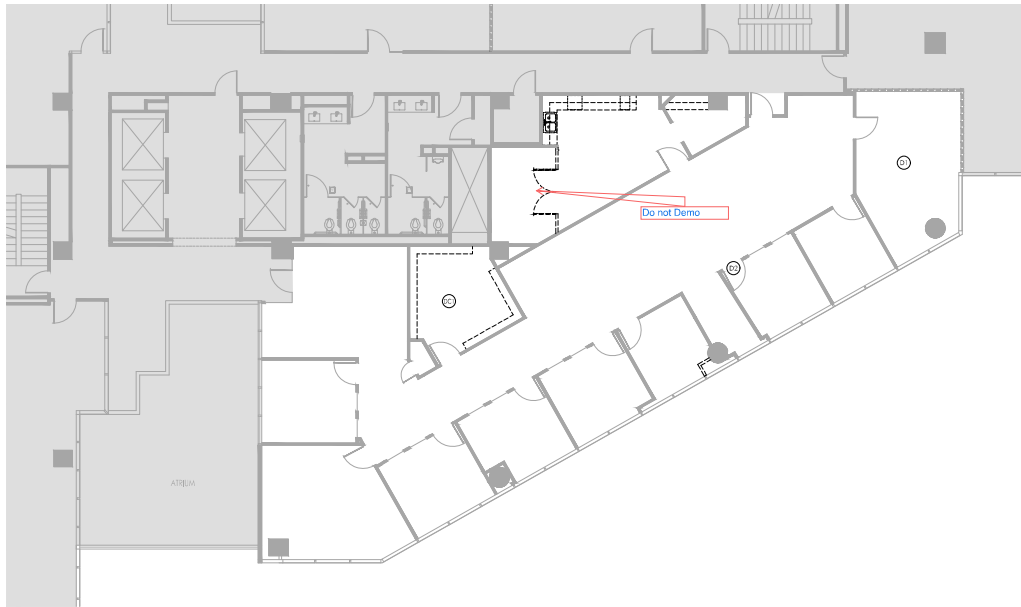

Key Plan
Scale: 1/16" = 1'-0"

NOTES

DEMOLITION PLAN NOTES

1. REMOVE ALL FINISHES (FLOORING, BASE AND WALLCOVERING) FOR PROPER INSTALLATION OF NEW FINISHES SPECIFIED ON FINISH PLAN, U.N.O.
2. REMOVE WALLS AND OTHER ITEMS (INCLUDING, BUT NOT LIMITED TO DOORS/FRAMES, GLAZING AND MILLWORK) AS INDICATED ON PLAN.
3. ALL PLUMBING AND ELECTRICAL SYSTEMS SHALL REMAIN U.N.O. WHERE PLUMBING FIXTURES AND ELECTRICAL OUTLETS ARE REMOVED. CONTRACTOR SHALL TERMINATE AT THE PRIMARY SOURCE, UNLESS REUSE IS POSSIBLE.
4. ELECTRICAL DEVICES, SWITCHES AND COVERPLATES SHALL REMAIN, U.N.O. REMOVE AND CAP ALL OUTLETS, SWITCHES, WIRES, AND THERMOSTATS TO THEIR SOURCE IN PARTITIONS TO BE REMOVED.
5. CONTRACTOR SHALL REMOVE ABANDONED DATA/COMMUNICATIONS CABLING BACK TO THE PHONE BOARD. PRIOR TO REMOVAL, COORDINATE WITH OWNER'S REPRESENTATIVE.

DEMOLITION KEY NOTES

- D1. REMOVE EXISTING CEILING MOLDING THROUGHOUT.
- D2. REMOVE PLAQUE FROM EXISTING DOOR TO REMAIN.

DEMOLITION CEILING PLAN NOTES

1. REMOVE CEILING GRID, TILE, LIGHTS, AND EXIT SIGNS THROUGHOUT, U.N.O.
2. ALL MECHANICAL SYSTEMS SHALL REMAIN TO THE EXTENT POSSIBLE U.N.O. WHERE MECHANICAL DEVICES ARE REMOVED, COORDINATE FOR REUSE OR OTHERWISE TERMINATE BACK TO SOURCE.

DEMOLITION CEILING KEY NOTES

- DCT. REMOVE EXISTING GYP BOARD CEILING AND LIGHTS FOR PROPER INSTALLATION OF NEW CEILING GRID AND TILE.

REUSE/DISPOSAL OF DEMOLISHED ITEMS

- DOORS - DISPOSE
- FRAMES - DISPOSE
- HARDWARE - DISPOSE
- FIRE EXTINGUISHER CABINET - DISPOSE
- CEILING GRID - DISPOSE
- CEILING TILE - DISPOSE
- LIGHTING - DISPOSE
- LIGHT SWITCHES - DISPOSE
- EXIT SIGNS - DISPOSE

GENERAL NOTES

DEFINITIONS AND ROLES

- **OWNER'S REPRESENTATIVE:** PROPERTY MANAGER/CONSTRUCTION MANAGER (APPROVES DECISIONS AFFECTING COSTS)
- **OCCUPANT'S REPRESENTATIVE:** TENANT OR OWNER'S PROJECT MANAGER
- **ARCHITECT:** TENANT'S DESIGN REPRESENTATIVE (APPROVES DECISION AFFECTING DESIGN)

NOTES TO OCCUPANT'S REPRESENTATIVE

1. OCCUPANT'S REPRESENTATIVE IS RESPONSIBLE FOR THE FURNISHING AND INSTALLING THE FOLLOWING:
 - PHONE/COMPUTER SYSTEM AND VOICE/DATA CABLING
 - AUDIO AND VISUAL EQUIPMENT AND WIRING
 - SECURITY EQUIPMENT, HARDWARE AND WIRING
 - FURNITURE

NOTES TO CONTRACTOR

1. THE WORK OF THIS PROJECT SHALL BE COORDINATED WITH THE OWNER'S REPRESENTATIVE. COST SHALL BE SUBMITTED TO THE APPROPRIATE PARTY.
2. CONTACT OWNER'S REPRESENTATIVE FOR BUILDING RULES AND REGULATIONS PRIOR TO BID.
3. PROVIDE A COST TO CONSTRUCT THE WORK INDICATED HEREIN. COST SHALL INCLUDE PERMITS, MATERIALS, LABOR (INCLUDING OVERTIME), OVERHEAD, PROFIT AND TAXES.
4. COORDINATE REQUIREMENT OF AN ASBESTOS TEST WITH THE OWNER'S REPRESENTATIVE.
5. CONTRACTOR SHALL WALK SPACE PRIOR TO SUBMITTING COST. NOTIFY ARCHITECT OF CONCERNS OR CONFLICTS.
6. DO NOT SCALE DRAWINGS. CONTACT ARCHITECT FOR ADDITIONAL INFORMATION.
7. THE WORK DESCRIBED HEREIN SHALL CONFORM TO FEDERAL, STATE AND LOCAL CODES, INCLUDING TEXAS ACCESSIBILITY STANDARDS AND AMERICAN WITH DISABILITIES ACT.
8. USE BUILDING STANDARD ITEMS, U.N.O. CHECK WITH OWNER'S REPRESENTATIVE FOR SPECIFICATION AND AVAILABILITY.

FIRE SPRINKLER

1. AUTOMATIC FIRE SPRINKLER EXISTS AND SHALL BE MODIFIED TO CONFORM TO IMPROVEMENTS. ALL SPRINKLER HEADS SHALL MATCH EXISTING HEADS. ALL SPRINKLER HEADS TO HAVE ESCUTCHEONS.
2. NEW SPRINKLER HEADS SHALL BE CENTERED WITHIN CEILING TILE.

FIRE ALARM

1. IF FIRE ALARM SYSTEM EXISTS, MODIFY AS REQUIRED.
2. WHERE FIRE ALARM PANEL EXISTS, ENSURE INSTALLATION OF SMOKE DETECTOR AT FIRE ALARM PANEL.

LEGEND

[ALL SYMBOLS MAY NOT APPLY]

EXISTING TO REMAIN ITEMS ARE SCREENED (GRAYED OUT)

GENERAL

- 0000 NOT IN CONTRACT
- ROOM NUMBER
- OFFICE ROOM NAME
- PHONE BOARD
- WATER LINE WITH SHUT-OFF VALVE
- FIRE EXTINGUISHER CABINET
- DEMOLISHED ITEMS
- SIDEWALK/WINDOW
- EXISTING PARTITION
- NEW PARTITION
- DEMISING PARTITION AND/OR NEW PARTITION TO DECK WITH SOUND INSULATION
- NEW PARTITION TO DECK (NO SOUND INSULATION)
- ONE HOUR PARTITION W/ SOUND INSULATION
- TWO HOUR PARTITION W/ SOUND INSULATION
- NEW PARTITION W/ SOUND INSULATION
- HALF HEIGHT WALL

FINISH

- FINISH TRANSITION
- FINISH MARK
- WALL FINISH
- BASE FINISH
- FLOOR FINISH
- ACCENT WALL CONDITION

ELECTRICAL

- DUPLEX OUTLET
- DEDICATED OUTLET, ORANGE
- J-BOX WITH POWER
- COMMUNICATION PULL STRING & RING ONLY (DEVICE BY OTHERS)
- TV/MONITOR, PULL STRING & RING
- WALL MOUNTED FURNITURE FEED 4" X 4" BOX, S.S. COVERPLATE
- WALL MOUNTED VOICE/DATA, 4" X 4" BOX, PULL STRING & RING, S.S. COVERPLATE
- WALL DEVICE AT HEIGHT INDICATED A.F.F.
- DUPLEX ONLY 3" POKE THRU
- DUPLEX/VOICE/DATA 4" POKE-THRU
- DUPLEX/VOICE/DATA/AV 6" POKE-THRU
- FURN FEED HARDWIRED/VOICE/DATA 4" POKE-THRU
- CARD READER (PULL STRING AND RING ONLY)
- REQUEST TO EXIT (PULL STRING AND RING ONLY)
- MAGNETIC LOCK (PULL STRING AND RING ONLY)
- ELECTRIC STRIKE (PULL STRING AND RING ONLY)
- QUADRUPLUX OUTLET
- DEDICATED QUADRUPLUX, ORANGE
- DUPLEX / USB-A / USB-C OUTLET

ROOM SIZES ARE APPROXIMATE ONLY AND ARE NOT TO BE USED FOR FINAL DETERMINATION OF FURNITURE SIZES OR PLACEMENT.

CODE INFORMATION

CODE COMPLIANCE

- BUILDING - 2021 IBC
- FIRE SAFETY - 2021 IFC
- MECHANICAL - 2021 IMC
- PLUMBING - 2021 IPC
- ELECTRICAL - 2021 NEC
- ENERGY - 2021 IECC
- ACCESSIBILITY - 2012 IAS

OTHER

- FULL FIRE SPRINKLERED - YES
- OCCUPANCY GROUP - BUSINESS
- EMERGENCY VOICE ALARM - YES
- COMMUNICATION SYSTEM

OCCUPANCY LOAD SUMMARY - SCOPE OF WORK

FUNCTION OF SPACE	LOAD FACTOR	AREA (S.F.)	# OF OCCUPANTS
BUSINESS AREAS	150 GROSS	2877	20
CONCENTRATED BUSINESS USE AREA	HEAD COUNT	340	5
ASSEMBLY - UNCONCENTRATED	15 NET	442	30
STORAGE AREAS	300 GROSS	0	0
TOTAL		3659	55

EGRESS - SCOPE OF WORK

PATH OF TRAVEL	MAX. DISTANCE ALLOWED	ACTUAL DISTANCE
COMMON PATH OF TRAVEL	100'	41'
TOTAL TRAVEL DISTANCE (B OCC.)	300'	75'
DEAD END	50'	0'

EXIT SEPARATION

OCCUPANT CLASSIFICATION	MAX. DIAGONAL	MIN. ALLOWED SEPARATION	ACTUAL EXIT SEPARATION
SCOPE OF WORK	114	38'	68'
ENTIRE FLOOR	222	74'	97'



entos design

5400 LBJ Freeway, Suite 125 Dallas, Texas 75240
P. 972.770.2222 | www.entosdesign.com

ISSUED FOR PRELIMINARY PURPOSES ONLY.

THESE DOCUMENTS MAY NOT BE USED FOR REGULATORY APPROVAL, PERMITTING OR CONSTRUCTION.

These drawings are assumed to be complete and final. It shall be the tenant/client's responsibility to review and bring to writing any design discrepancies to the designer's attention. Any design changes will be at additional expense. The designer shall not be held responsible for city, state and federal code/regulation authority's interpretations.

Approved: _____ Date: _____

For Review: 11/21/2024

No. Issued: _____ Date: _____

Spec Suite 250

BrookHollow II

2221 E. Lamar Blvd.
Suite No: 250
Arlington, Texas 76006

4,208 RSF
Project ID: 23-1173-L013

Sheet Title

Pricing Plan 1.0P

Sheet Number

© 2024

PP1

