


915 WEST MITCHELL
ARLINGTON, TEXAS

A-1

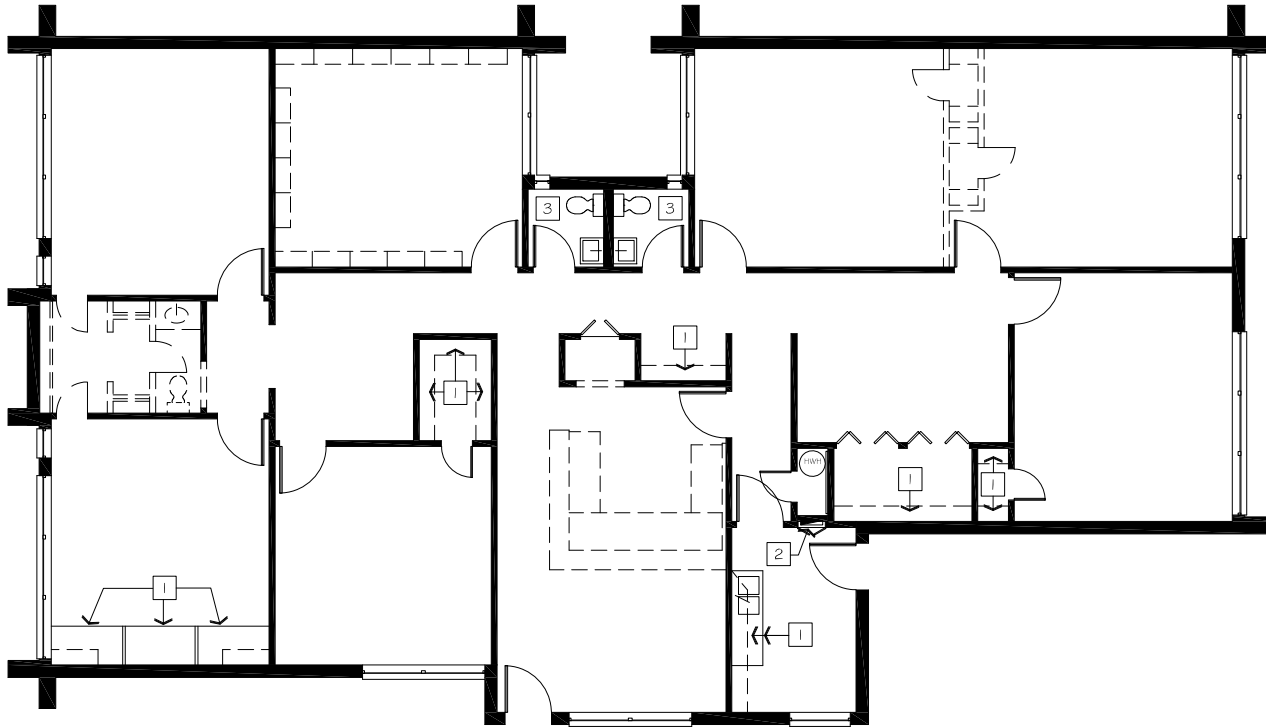

FIRST FLOOR - DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

DEMOLITION PLAN LEGEND

	REMOVE EXISTING DOOR
	REMOVE EXISTING WALL
	EXISTING WALL TO REMAIN
	EXISTING DOOR TO REMAIN

GENERAL DEMOLITION NOTES

1. The Contractor shall verify all existing conditions prior to submitting a bid. The bid shall include, but not be limited to, all work required to perform the demolition of existing walls, doors and frames, finish materials, electrical and data outlets, lighting fixtures, HVAC duct work, etc., shown to be demolished, for the execution of these plans.
2. All electrical and data outlets within walls to be demolished shall be removed to nearest J-box which is not in the area to be demolished.
3. Contractor shall coordinate with Building Management the inventory and relocation of all reusable building materials and fixtures.
4. Doors shown to be removed are to be salvaged, refinished, stored and reused, where possible. Check doors and hardware for proper operation.
5. Contractor to patch and repair any area affected by demolition.
6. All existing cables determined to be unused shall be removed back to first junction box. All other cables shall be supported as neatly as possible.
7. Any wiring that is disconnected shall be removed back to the panel board of origin and re-label breaker "spare".

DEMOLITION PLAN NOTES

1. Existing millwork at these locations to remain.
2. Existing electrical panel to remain at this location.
3. Existing restroom fixtures to remain in the rooms indicated.



1111 Amber Rose Way
Arlington, Texas 76005
(817) 929-8604

PROJECT:

915 WEST MITCHELL
915 W. MITCHELL
ARLINGTON, TEXAS

LOCATION:
1ST FLOOR

TENANT:
ARLINGTON URBAN
MINISTRIES

NOTE TO CONTRACTOR:

Contractor is to field verify all dimensions. Written dimensions are to have precedence over scaled dimensions. The contractor shall verify, and be responsible for all dimensions and conditions on the job, and DFW Design Depot, LLC must be notified of any variations from the dimensions and conditions shown on these drawings. Shop drawings must be submitted to DFW Design Depot, LLC for approval before proceeding with fabrication. The contractor remains responsible for details and accuracy, for confirming and completing all quantities and dimensions, for selecting fabrication processes, for techniques of assembly, for performing the work in a safe manner, and for adhering to all applicable codes.

DATE: 12-23-25
SCALE: 1/8" = 1'-0"
DRAWN BY: DS
PROJECT #: 1029


REVISION DATE

SHEET TITLE:

DEMOLITION PLAN

DRAWING NUMBER:

A-3

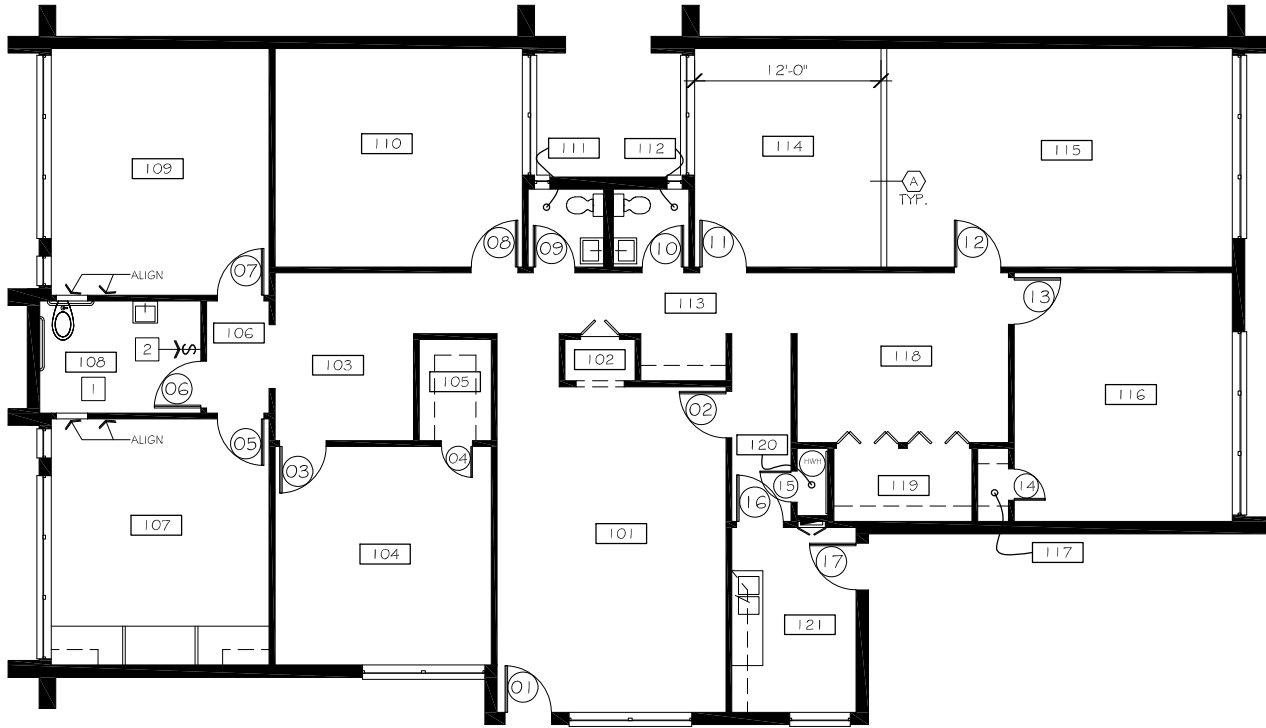

FIRST FLOOR - CONSTRUCTION PLAN
SCALE: 1/8" = 1'-0"

CONSTRUCTION PLAN LEGEND	
	EXISTING WALL TO REMAIN
	NEW WALL (WALL TYPE 'A' UNLESS OTHERWISE NOTED)
	DOOR IDENTIFICATION (SEE DOOR SCHEDULE SHEET 102)
	ROOM NUMBER
	ALIGN FINISH TO EXISTING
	WALL TYPE
	NOTE REFERENCE

GENERAL CONSTRUCTION NOTES

- This Space is an existing finished out space. All construction to be in accordance with building standard materials, i.e., partitions, tape, bed, texture, paint, doors, frame, hardware, ceiling grid and lights, etc.
- All new construction to be 5/8" gypsum board on metal studs. All walls to be type "A", unless noted otherwise. Refer to Sheet A-2 for wall types.

CONSTRUCTION PLAN NOTES

- Contractor to provide and install new fixtures in Room 108 to meet A.D.A./T.A.S. standards. Refer to Fixture Schedule on Sheet A-2 for details and specifications. Contractor to re-use existing plumbing, if possible.
- Existing lighting to remain in Room 108. Contractor to relocate switch and rewire lights to operate from new switch at location shown.

DOOR TYPES

A. New 3'-0" wide x 7'-0" high building standard interior door to match existing doors.

B. Existing door to remain.

NOTES

- Contractor to verify conditions of all existing and relocated doors and frames. All doors and frames are to appear as new.

HARDWARE TYPES

- New or relocated building standard passage set.
- New or relocated building standard lockset.
- New or relocated Privacy lockset.
- Existing hardware to remain.

NOTES

- Provide building standard door stops throughout.
- All new door locations are to receive new lever hardware that complies with ADA specifications. Finish to match building standard hardware.

DOOR SCHEDULE											
DOOR NO.	TYPE	OPENING SIZE	HDWR.	REMARKS		DOOR NO.	TYPE	OPENING SIZE	HDWR.	REMARKS	
01	B	3'-0"	A			11	B	2'-8"	A		
02	B	3'-0"	A			12	B	3'-0"	A		
03	B	3'-0"	A			13	B	3'-0"	A		
04	B	2'-0"	A			14	B	2'-0"	A		
05	B	3'-0"	A			15	B	2'-0"	A		
06	A	3'-0"	B			16	B	3'-0"	A		
07	B	3'-0"	A			17	B	3'-0"	A		
08	B	3'-0"	A								
09	B	3'-0"	A								
10	B	2'-8"	A								



DFW DESIGN DEPOT
1111 Amber Rose Way
Arlington, Texas 76005
(817) 929-8604

PROJECT:
915 WEST MITCHELL
915 W. MITCHELL
ARLINGTON, TEXAS

LOCATION:
1ST FLOOR
TENANT:
ARLINGTON URBAN
MINISTRIES


NOTE TO CONTRACTOR:
Contractor is to field verify all dimensions. Written dimensions are to have precedence over scaled dimensions. The contractor shall verify, and be responsible for all dimensions and conditions on the job, and DFW Design Depot, LLC must be notified of any variations from the dimensions and conditions shown on these drawings. Shop drawings must be submitted to DFW Design Depot, LLC for approval before proceeding with fabrication. The contractor remains responsible for details and accuracy for confirming and completing all quantities and dimensions, for selecting fabrication processes, for techniques of assembly, for performing the work in a safe manner, and for adhering to all applicable codes.

DATE: 12-23-25
SCALE: 1/8" = 1'-0"
DRAWN BY: DS
PROJECT #: 1029

REVISION	DATE

SHEET TITLE:
CONSTRUCTION PLAN

DRAWING NUMBER:
A-4

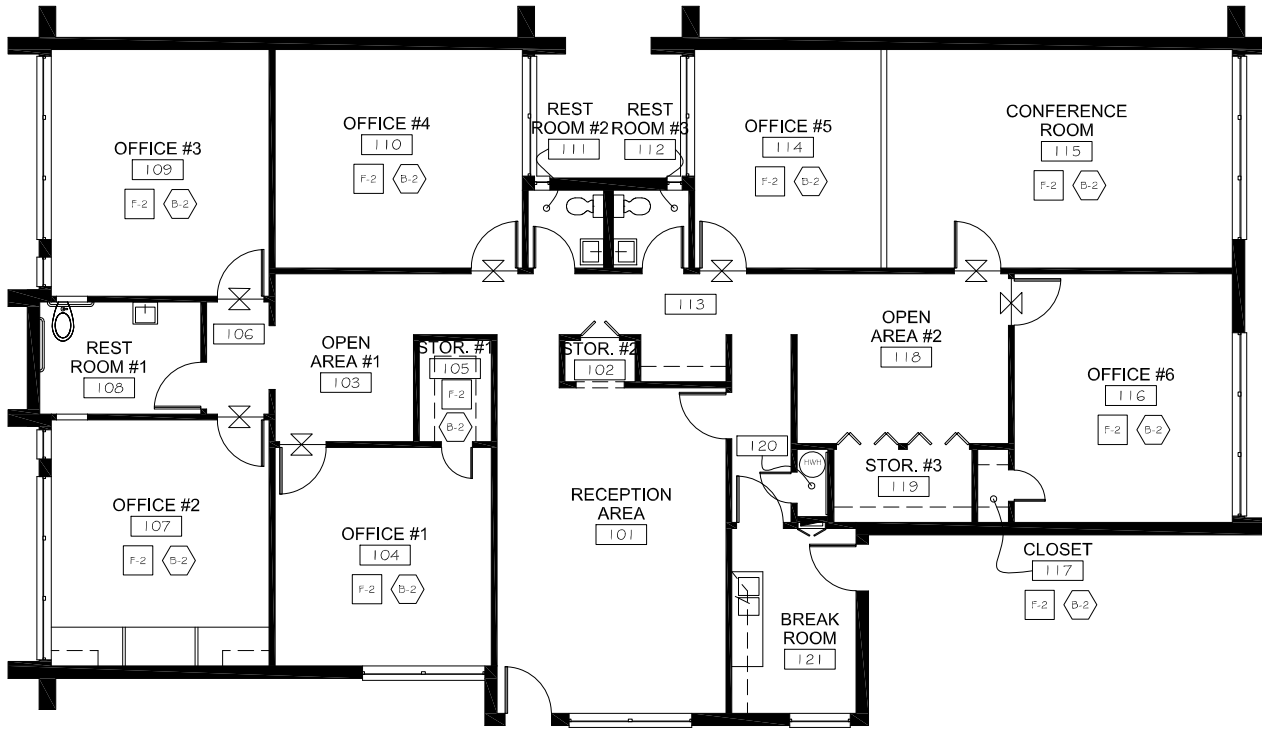

FIRST FLOOR - FINISH PLAN
SCALE: 1/8" = 1'-0"

FINISH PLAN LEGEND

-  INDICATES FLOOR FINISH CHANGE
-  INDICATES FLOOR FINISH
-  INDICATES BASE FINISH
-  INDICATES WALL FINISH

GENERAL FINISH MATERIAL NOTES --

- All walls to be painted P-1, unless noted otherwise.
- All floors to be F-1, unless noted otherwise.
- All bases to be B-1, unless noted otherwise.

FINISH SCHEDULE

- F-1 LVT (LUXURY VINYL TILE):** LVT flooring, Color to be selected by tenant.
- F-2 CARPET:** Carpet to be building standard 30 ounce, cut pile or 26 ounce, level-loop. Direct glue application. Color to be selected by tenant.
- B-1 BASE:** 4" high, rubber cove base. Color to be selected by tenant.
- B-2 BASE:** 4" high, rubber cove base. Color to be selected by tenant.
- P-1 PAINT:** Color to be selected by tenant.



1111 Amber Rose Way
Arlington, Texas 76005
(817) 929-8804

PROJECT:

915 WEST MITCHELL
915 W. MITCHELL
ARLINGTON, TEXAS

LOCATION:
1ST FLOOR

TENANT:
ARLINGTON URBAN
MINISTRIES

NOTE TO CONTRACTOR:
Contractor is to field verify all dimensions. Written dimensions are to have precedence over scaled dimensions. The contractor shall verify, and be responsible for all dimensions and conditions on the job, and DFW Design Depot, LLC must be notified of any variations from the dimensions and conditions shown on these drawings. Shop drawings must be submitted to DFW Design Depot, LLC for approval before proceeding with fabrication. The contractor remains responsible for details and accuracy, for confirming and completing all quantities and dimensions, for selecting fabrication processes, for techniques of assembly, for performing the work in a safe manner, and for adhering to all applicable codes.

DATE: 12-23-25
SCALE: 1/8" = 1'-0"
DRAWN BY: DS
PROJECT #: 1029

REVISION	DATE

SHEET TITLE:

FINISH PLAN

DRAWING NUMBER:

A-5